


TURBIDIMETER

MODEL 977-C

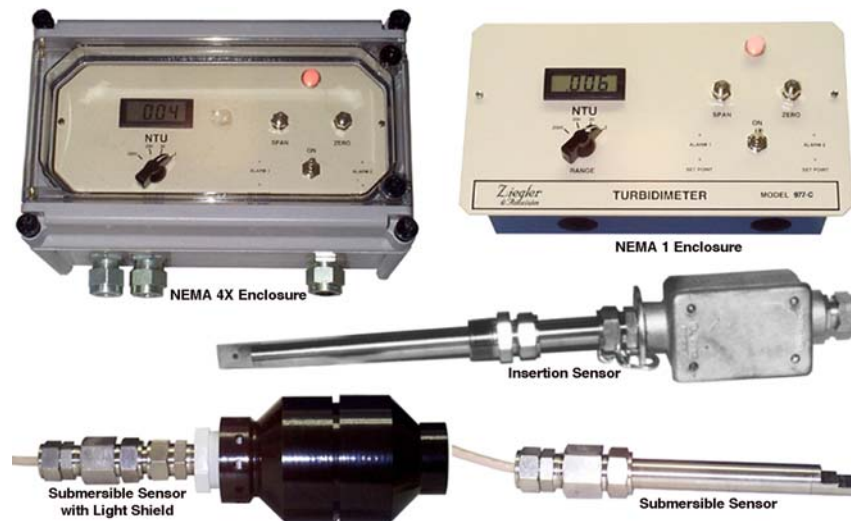

PRODUCT DESCRIPTION

This innovative turbidimeter uses an insertion-type sensor that can be inserted in any size pipe, thus avoiding costly bypass systems. A submersible sensor is available for open channel applications. The design eliminates the effects of fluid color. In-situ measurements provide instantaneous accurate readings and the instrument comes standard with a choice of isolated linear outputs. A 4-position calibrated range dial allows for the selection of four NTU ranges.


FEATURES

- Wide dynamic range
- In-line measurements assure maximum accuracy
- Hot-tap installation permits uninterrupted flow
- Linear-isolated output
- Optional alarms, battery power
- Use in any size pipe
- High accuracy and reliability
- Insensitive to visible colors, flow, temperature & pressure
- One-year limited warranty


PRINCIPLE OF OPERATION

This turbidimeter uses a prefocused incandescent lamp to direct a beam of light through the process fluid. Particulate matter in the fluid scatters light in proportion to particulate concentration. The scattered light is received by a silicon detector which generates a current signal proportional to the particulate concentration. The electronic signal converter amplifies and scales the current signal to provide a linear readout on a digital meter with an isolated output signal.


MODEL 977-C TYPICAL SENSOR MOUNTING

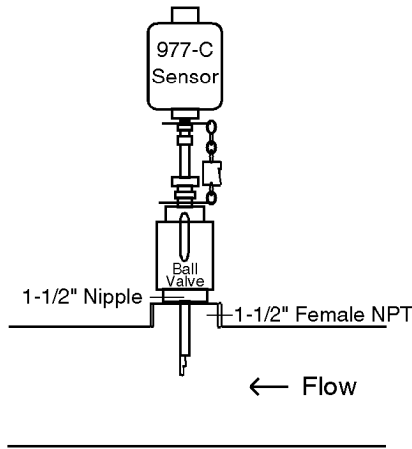

Large Pipe
With Pipe Insertion Assembly

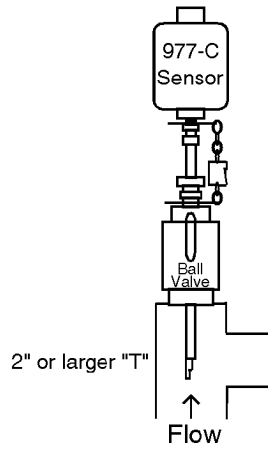

Small Pipe
With Pipe Insertion Assembly

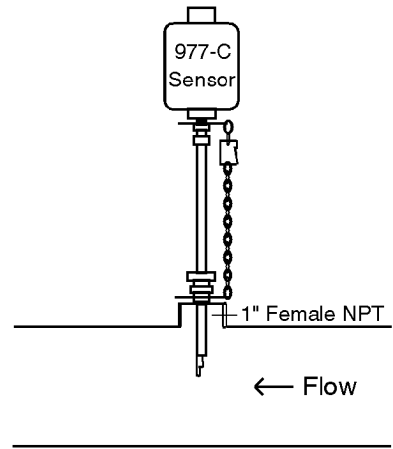

Large Pipe
Without Pipe Insertion Assembly

SPECIFICATIONS


SENSORS

Type	Insertion Probe	Submersible Probe
Size	Pipes greater than 2 inches	Open channel/tanks
Wetted Parts	316 Stainless, glass	316 Stainless, glass
Process Temp.	15°F to 230°F (-10°C to 110°C)	15°F to 140°F (-10°C to 60°C)
Pressure	0 to 150 psig	0 to 50 psig (110 feet of water)
Mounting	1" NPT male	Cable or rigid mount
Dimensions		
Diameter	7/8"	7/8"
Length	12"	8"
Junction Box	2 X 4 X 2"	None

TRANSMITTER

Display	3-1/2 digit LCD indicator
Range	0 to 2, 0 to 20, 0 to 200, 0 to 2000 NTU switch selectable
Input	Model 977-C Sensor
Output	4 to 20 mA into 600 ohms max. isolated, other outputs available
Resolution	0.05%
Repeatability	Range dependent 0.01 NTU
Accuracy	2%
Ambient Temperature	32°F to 120°F (0°C to 50°C)
Alarms	Optional dual alarms
Enclosure	NEMA 1 or NEMA 4X
Dimensions	
NEMA 1	11" W x 6" H x 4" D
NEMA 4X	11-7/8" x 7-1/4" x 6-3/4"
Mounting	
NEMA 1	Panel or wall mount
NEMA 4X	Wall or pipe mount
Power	115 or 230 VAC @ 50/60 Hz, 20 Watts. Optional 12 & 24 VDC etc.
Shipping Weight	16-24 lbs. depending on options

Represented By:

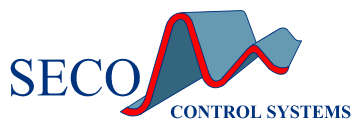

450 West Larch Road, Suite 5
Tracy, CA 95304
USA

888-798-8300 (USA) or 209-839-8600

FAX 209-839-8601

E-Mail: sales@secocontrols.com